

2681

Practitioner's Docket No. 915.407

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

#2

In re application of: M. LEHTIMAKI et al.
Group No.: 2681
Application No.: 0 10 / 006,791
Filed: December 6, 2001 Examiner: Not Yet Assigned
For: Telecommunication Network and Routing Method

RECEIVED

MAY 0 6 2003

Assistant Commissioner for Patents
Washington, D.C. 20231

Technology Center 2600

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:

Country: International
Application Number: PCT/EP99/04520
Filing Date: June 30, 1999

WARNING: "When a document that is required by statute to be certified must be filed a copy, including a photocopy or facsimile transmission of the certification is not acceptable." 37 C.F.R. § 1.4(f) (emphasis added).


SIGNATURE OF PRACTITIONER

Reg. No. 27,550

Alfred A. Fressola

(type or print name of practitioner)

Tel. No. (203) 261-1234

Ware, Fressola, Van Der Sluys & Adolphson LLP

Customer No.: 004955

P.O. Address Bradford Green, Building Five
755 Main Street, P.O. Box 224
Monroe, CT 06468

NOTE: The claim to priority need be in no special form and may be made by the attorney or agent, if the foreign application is referred to in the oath or declaration, as required by § 1.63.

CERTIFICATE OF MAILING (37 C.F.R. § 1.8a)

I hereby certify that this correspondence is, on the date shown below is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.



Signature

Date: April 28, 2003

Annemarie Maher

(type or print name of person certifying)

(Transmittal of Certified Copy [5-4])



#6



RECEIVED

MAY 06 2003

Technology Center 2600

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten internationalen Patentanmeldung überein.

The attached documents are exact copies of the international patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet international spécifiée à la page suivante.

Den Haag, den
The Hague,
La Haye, le

26 FEB 2003

Der Präsident des Europäischen Patentamts
Im Auftrag
For the President of the European Patent Office
Le Président de l'Office européen des brevets
p.o.

C.A.J.A. PASCHE

Patentanmeldung Nr.
Patent application no.
Demande de brevet n°

PCT/EP 99/04520

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation



Anmeldung Nr.:
Application no.: PCT/EP 99/04520
Demande n°:

Anmelder:
Applicant(s): 1. NOKIA TELECOMMUNICATIONS OY - Espoo, Finland
Demandeur(s): 2. LEHTIMÄKI, Matti - Espoo, Finland (US only)
3. SUVANEN, Jyri - Helsinki, Finland (US only)

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention: TELECOMMUNICATION NETWORK AND ROUTING METHOD

Anmeldetag:
Date of filing:
Date de dépôt: 30 June 1999 (30.06.1999)

In Anspruch genommene Priorität(en)
Priority(ies) claimed
Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Benennung von Vertragsstaaten : Siehe Formblatt PCT/RO/101 (beigefügt)
Designation of contracting states : See Form PCT/RO/101 (enclosed)
Désignation d'états contractants : Voir Formulaire PCT/RO/101 (ci-joint)

Bemerkungen:
Remarks:
Remarques:

V	Designation of States	
V-1	<p>Regional Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)</p>	<p>AP: GH GM KE LS MW SD SZ UG ZW and any other State which is a Contracting State of the Harare Protocol and of the PCT EA: AM AZ BY KG KZ MD RU TJ TM and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT EP: AT BE CH&LI CY DE DK ES FI FR GB GR IE IT LU MC NL PT SE and any other State which is a Contracting State of the European Patent Convention and of the PCT OA: BF BJ CF CG CI CM GA GN GW ML MR NE SN TD TG and any other State which is a member State of OAPI and a Contracting State of the PCT</p>

PCT REQUEST

WO 24309

Original (for SUBMISSION) - printed on 30.06.1999 12:16:17 PM

V-2	National Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AE	AL	AM	AT	AU	AZ	BA	BB	BG	BR	BY	CA	
		CH&LI	CN	CU	CZ	DE	DK	EE	ES	FI	GB	GD	GE	
		GH	GM	HR	HU	ID	IL	IN	IS	JP	KE	KG	KP	KR
		KZ	LC	LK	LR	LS	LT	LU	LV	MD	MG	MK	MN	MW
		MX	NO	NZ	PL	PT	RO	RU	SD	SE	SG	SI	SK	SL
		TJ	TM	TR	TT	UA	UG	US	UZ	VN	YU	ZA	ZW	

Telecommunication Network and Routing MethodFIELD OF THE INVENTION

5

The present invention relates to a telecommunication network and a method for routing user data via an access network to a gateway device of a core network such as a third generation core network based on the GSM technology.

10

BACKGROUND OF THE INVENTION

15

Third generation mobile telecommunications systems aim at providing end-users, apart from terminal and personal mobility, with enhanced services. Compared to second generation systems, enhancements that will cover features all the way between the end-user and the core network elements are required, i.e. from mobile terminals to radio access and fixed networks. As an example, the Universal Mobile Telecommunications System (UMTS) is a third generation system which assumes a B-ISDN core network.

20

Significantly, utilization of existing technologies gives rise to numerous issues concerning the protocols employed. The most essential aspect requiring further investigation is how protocol specification effort can be minimized by re-using existing protocols and functionality while preserving the functional specifications and performance goals that UMTS is setting. The UMTS concept is being developed and will be integrated with the International Telecommunication Union (ITU) as a proposal for an IMT-2000 standard. UMTS/IMT-2000 will provide ubiquitous wireless access to next-generation personalized services wherever suitable frequencies are available. GSM operators have

25

30

-2-

several options for delivering enhanced services. For example, they may use GSM in the existing frequency spectrum to deliver UMTS/IMT-2000-capable services, they may use GSM and WCDMA (Wideband Code Division Multiple Access) in the existing spectrum or they may use GSM and WCDMA in the existing spectrum combined with WCDMA in a new 2GHZ UMTS/IMT-2000 spectrum. All approaches offer low entry costs, a high degree of investment flexibility, since roll out can take place in line with market demand, as well as extensive reuse of existing GSM equipment. Not only does WCDMA offer full backwards compatibility with GSM, it fully draws on GSM as the core network, including well-proven GSM functionality.

Fig. 1 shows a diagram of network components of third generation (3G) mobile networks (UMTS, IMT-2000) and the corresponding interfaces used for connecting the network components. According to Fig. 1, a GSM network 10 is connected via an Ater interface to a third generation core network 7. The third generation core network 7 can be based on GSM technology, i.e. it may comprise a GSM mobile switching center (MSC). In this case, the same MSC can handle both GSM and 3G radio access networks via an open A interface.

A 3G radio access network (3G RAN) 2 is connected via an Iu interface to the core network 7. Thus, in case a GSM MSC is used in the core network 7, the Iu interface must be adapted through an interworking unit (IWU) to the A interface of the GSM MSC. Furthermore, transcoders (TCs) (not shown) are located at the core network sides of the Ater interface and the ATM based Iu interface, wherein speech is transmitted in coded format over these interfaces. The TCs adapt the respective coding of the Ater

-3-

interface and the Iu interface to the coding required for the open A interface of the core network 7. The TC arranged between the Iu interface and the A interface is a 3G TC and may be located in the IWU or may be part of the radio

5 network controller (RNC) provided in the 3G RAN 2. In the latter case, an Iu interface is not provided. Another possibility is to provide a dedicated 3G MSC for the 3G RAN 2.

10 The core network 7 is connected via an ISUP (ISDN Signaling User Part) interface to a PSTN (Public Switched Telephone Network) and an ISDN (Integrated Services Digital Network). The ISUP interface provides the required ISDN call set up and control functions. Furthermore, the core network 7 is
15 connected via a TCP/IP (Transmission Control Protocol/Internet Protocol) interface to the Internet.

Accordingly, the Internet, PSTN or ISDN can be accessed from the cellular GSM or 3G RAN networks 10 and 2 via the
20 common core network 7 by means of a usual GSM mobile station (MS) 1a, a MS 1b having a GSM and a 3G capability, and a 3G MS 1c with enhanced third generation capabilities.

In addition to the above transcoding function, the core
25 network 7 may comprise additional adaptation functions, for example modems and video codecs. However, similar to the TCs, these signal processing functions have to be separately provided at each access network interface, such that an increased number of network resources is required.

30

On the other hand, the interconnections to other networks currently require to offer real-time transport capabilities via IP (Internet Protocol) based interfaces. Therefore, interconnecting devices, typically called gateways (GW),

-4-

are required, which further increase the number of network resources. Thus, a simple method for connecting mobile networks to IP based networks is required. Moreover, it would be beneficial to have an open interface between
5 network controlling devices such as the MSC and actual user-plane processing functions.

SUMMARY OF THE INVENTION

10 It is therefore an object of the present invention to provide a telecommunication network by means of which network resources required for connecting mobile networks to other networks can be saved.

15 This object is achieved by telecommunication network having at least one access network, a core network connected to the access network via a first interface, and at least one terminal device,
wherein the core network comprises at least one access
20 network control device adapted to control at least one gateway device via a second interface by transmitting a control information; and
wherein the telecommunication network is adapted to route user data directly between the access network and one
25 gateway device via the first interface.

Additionally, the above object is achieved by a method for routing user data via an access network to a gateway device of a core network connected to the access network via a
30 first interface, comprising the steps of:
controlling the gateway device by supplying a control information from the core network to the gateway device via a second interface; and

-5-

routing the user data directly between the access network and the gateway device via the first interface.

Accordingly, since the user data is directly routed between
5 the access network and the gateway device via the first
interface, processing resources required for transcoding
and other data processing functions can be shared between
several applications. Thereby, trunking gains can be
utilized. The control is performed by the access network
10 controlling entity, e.g. the MSC, via a dedicated and open
control interface. This way, the access network controlling
entity may control the resources efficiently and over long
distances. Hence, according to the invention, substantial
savings in the resources can be achieved, if all user-plane
15 processing functions can be co-located in the gateway
entity of a 3G mobile network. Thus, control and user
planes can be separated.

The first interface may be connected via a transmission
20 network directly from the access network to a gateway
device.

A second possibility is to connect the second interface via
a transmission network and another access network control
25 device to the gateway device.

A third possibility is to connect the second interface via
the access network and the first interface to the gateway
device. In this case, the control for the gateway device is
30 transmitted together with the user data, i.e. in-band, and
an out-band control is provided between the access network
control device and the access network. Then, the access
network maps the out-band control information into an in-
band information.

Preferably, the second interface may be adapted to use the ISUP protocol or the MGCP (Media Gateway Control Protocol). The first interface may be an Iu interface.

5

Preferably, the user data may comprise real-time data, such as speech, audio and/or video data. In this case, the user data may be transmitted using the RTP (Real-Time Protocol). Thereby, real-time audio and video information can be transmitted or received via the Internet.

10

Preferably, the user data may be routed via a packet network, such as an ATM network or an IP network. The control information may be transmitted via a TDMA network or also a packet network such as the ATM or IP network.

15

Preferably, the access network control unit is a mobile switching center.

20

BRIEF DESCRIPTION OF THE DRAWINGS

In the following, the present invention will be described in greater detail on the basis of a preferred embodiment with reference to the accompanying drawings, in which:

25

Fig. 1 shows a diagram of a telecommunication network comprising cellular networks connected to fixed networks,

Fig. 2 shows a block diagram of a core network according to the preferred embodiment of the present invention, and

30

-7-

Fig. 3 shows a diagram indicating information flows between network components, according to three examples of the preferred embodiment.

5

DESCRIPTION OF THE PREFERRED EMBODIMENT

In the following, the preferred embodiment of the telecommunication network and routing method according to the present invention will be described on the basis of 3G mobile networks.

Fig. 2 shows a block diagram of the GSM/3G core network 7 according to Fig. 1, which comprises a gateway device GW 5 connected to a fixed network such as the PSTN, ISDN or Internet. The 3G RAN 2 is connected via an Iu interface to a serving MSC (SMSC) 3 arranged for serving the 3G RAN 2. Furthermore, the 3G RAN 2 is directly connected via an Iu interface and a transmission network to the GW 5. The SMSC 3 of the core network 7 performs control so as to route user data directly from the 3G RAN 2 to the GW 5. The GW 5 is controlled by the SMSC 3 via a dedicated and open control interface. Furthermore, the GW 5 is connected via an MGCP interface to another MSC 4 which may be a serving or non-serving MSC. The GW 5 can be located separately or can be integrated into the MSC 4.

In particular, the GW 5 is a network element which provides conversion between the audio signals carried on telephone circuits and data packets carried over the Internet or other packet networks. The GW 5 may be a trunking gateway which provides an interface between the telephone network and a Voice over IP network, a Voice over ATM gateway which interfaces to an ATM network, a residential gateway which

-8-

provides a traditional analog interface to a Voice over IP network, an access gateway which provides a traditional analog or digital PBX (Private Branch Exchange) interface to a Voice over IP network, a business gateway which
5 provides a traditional digital PBX interface or an integrated „soft PBX" interface to a Voice over IP network, a network access server which can attach a modem to a telephone circuit and provide data access to the Internet, circuit switches or packet switches which can offer a
10 control interface to an external control element.

The MGCP interface is an interface arranged for controlling GW devices from external control elements. The MGCP assumes a call control architecture where the call control
15 „intelligence" is outside the gateways and handled by external call control elements. The MGCP assumes that these call control elements, or call agents will synchronize with each other to send coherent commands to the gateways under their control. MGCP does not define a mechanism for
20 synchronizing call agents. MGCP is, in essence, a master/slave protocol, where the gateways are expected to execute commands sent by the call agents, i.e. the SMSC 3. The MGCP is designed as an internal protocol within a distributed system that appears to the outside as a single
25 VoIP (Voice over Internet) gateway.

According to the preferred embodiment, the user data can be routed to the GW 5 through a separate network different from the one used for the control information. The separate
30 network may be a packet network such an ATM network or an IP network. The control signaling may use a TDMA or packet network, such as the user-plane ATM network or an IP network. Therefore, the SMSC 3 remains purely as an entity handling the control plane, such that TCs are no longer

required between MSCs and radio access networks connected to the core network 7. The control signaling may be performed via packet network such as an IP network

- 5 In the following, three examples for controlling the GW 5 by the SMSC 3 are described on the basis of Figs. 2 and 3.

Fig. 3 shows an information flow diagram in which data and control information flows are shown by corresponding
10 arrows, wherein each row corresponds to a separate transmission case and wherein an upper arrow indicates an earlier transmission.

In the upper (first) row of Fig. 3, the user data flow
15 between a mobile station (MS) and the GW 5 is indicated. The user data, such as real-time speech, audio, and/or video data are transmitted via a corresponding radio interface from the MS to the RAN 2. Subsequently, the user data are directly routed from the 3G RAN 2 to the GW 5 via
20 the Iu interface. Thereby, a transcoding function between the 3G RAN 2 and the SMSC 3 is not required. The data processing functions, such as transcoding, modems, video codex and the like can be provided centrally at the GW 5.

25 In the second row of Fig. 3, a first example for supplying the control information from the SMSC 3 to the GW 5 is shown. In this case, the SMSC 3 is connected via a MGCP interface to the GW 5 (cf. lower dotted line in Fig. 2). Thus, in this example, the control signaling is directly
30 transmitted from the SMSC 3 to the GW 5. Accordingly, a separate control plane connection is required between the SMSC 3 and the GW 5. It is noted that any other suitable control protocol could be used for controlling the GW 5.

-10-

A second control example is shown in the third row of Fig. 3. In this example, a separate in-band control signaling is performed between the 3G RAN 2 and the GW 5. Thus, in case there is no own control plane provided between the 3G RAN 2 and the GW 5 (for example an MGCP connection), a dedicated resource is required for the 3G RAN 2. Alternatively, resources can be allocated in the GW 5 based on the in-band signaling received from the 3G RAN 2. Additionally, an out-band control interface is provided between the SMSC 3 and the 3G RAN 2, wherein the 3G RAN 2 maps the out-band control information to the in-band control information submitted to the GW 5.

A third example is shown in the fourth row of Fig. 3, where the SMSC 3 controls the GW 5 via the other MSC 4 connected to the GW 5. In this option, a control-plane is required between the SMSC 3 and the MSC 4. This can be achieved e.g. by an updated ISUP interface, as shown by the upper dotted line in Fig. 2. In this case, the MSC 4 controlling the GW 5 can map the control information received via the ISUP interface to the MGCP used for controlling the GW 5. Alternatively, a known method can be used by the MSC 4 for converting the control information.

In summary, the present invention relates to a telecommunication network and a routing method, wherein user data are routed via an access network to a gateway device of a core network connected to the access network via a first interface. The control of the gateway device is performed by supplying a control information from the core network to the gateway device via a second interface, and the user data are routed directly between the access network and the gateway device via the first interface. Thus, the user data are routed directly from the access

-11-

network to the gateway, whereas the control can be performed via a dedicated and open control interface. Thereby, processing resources can be shared between several applications and trunking gains can be utilized.

- 5 Furthermore, real-time transport capabilities can be provided by a simple method of connecting the Internet to the mobile network.

- 10 It is to be pointed out that the telecommunication network and routing method described in the above preferred embodiment can be applied to any access network which is connected via a core network to a gateway device. In particular, the core network and the access network may be any kind of telecommunication network, and is thus not
- 15 restricted to a cellular or mobile network. Furthermore, any suitable access network control entity can be used for controlling the GW 5. The above description of the preferred embodiment and the accompanying drawings are only intended to illustrate the present invention. The preferred
- 20 embodiment of the invention may thus vary within the scope of the attached claims.

Claims

1. A telecommunication network having at least one access
5 network (2), a core network (7) connected to said access
network (2) via a first interface (Iu), and at least one
terminal device (1; 1a, 1b, 1c),
a) wherein said core network (7) comprises at least one
access network control device (3) adapted to control at
10 least one gateway device (5) via a second interface by
transmitting a control information; and
b) wherein said telecommunication network is adapted to
route user data directly between said access network (2)
and said at least one gateway device (5) via said first
15 interface.
2. A telecommunication network according to claim 1,
wherein said first interface is connected via a
transmission network directly from said access network (2)
20 to said gateway device (5).
3. A telecommunication network according to claim 1,
wherein said second interface is connected via a
transmission network and another access network control
25 device (4) to said gateway device (5).
4. A telecommunication network according to claim 1,
wherein said second interface is connected via said access
network (2) and said first interface to said gateway device
30 (5).
5. A telecommunication network according to any one of the
preceding claims, wherein said user data comprises real-
time data.

6. A telecommunication network according to claim 5,
wherein said user data comprises speech, audio, and/or
video data.

5

7. A telecommunication network according to claim 6,
wherein said user data is transmitted using the RTP.

10

8. A telecommunication network according to any one of the
preceding claims, wherein said second interface is adapted
to use the ISUP protocol.

15

9. A telecommunication network according to any one of
claims 1 to 7, wherein said second interface is adapted to
use the MGCP protocol.

20

10. A telecommunication network according to any one of the
preceding claims, wherein said access network is a radio
access network (2).

11. A telecommunication network according to any one of the
preceding claims, wherein said user data is routed via a
packet network.

25

12. A telecommunication network according to claim 11,
wherein said packet network is an ATM network.

13. A telecommunication network according to claim 11,
wherein said packet network is an IP network.

30

14. A telecommunication network according to any one of the
preceding claims, wherein said control information is
transmitted via a TDMA network.

-14-

15. A telecommunication network according to any one of claims 1 to 13, wherein said control information is transmitted via a packet network.
- 5 16. A telecommunication network according to claim 15, wherein said packet network is an ATM network.
17. A telecommunication network according to claim 15, wherein said packet network is an IP network.
- 10 18. A telecommunication network according to any one of the preceding claims, wherein said telecommunication network is a UMTS network.
- 15 19. A telecommunication network according to any one of the preceding claims, wherein said access network control unit is a mobile switching center (3).
- 20 20. A telecommunication network according to any one of the preceding claims, wherein said first interface is an Iu interface.
21. A method for routing user data via an access network (2) to a gateway device (5) of a core network (7) connected to said access network (2) via a first interface, comprising the steps of:
- 25 a) controlling said gateway device (5) by supplying a control information from said core network (7) to said gateway device (5) via a second interface; and
- 30 b) routing said user data directly between said access network (2) and said gateway device (5) via said first interface.

-15-

22. A method according to claim 21, wherein said control
information is supplied from said second interface to said
access network (2) and subsequently via said first
interface together with said user data to said gateway
5 device (5) .

23. A method according to claim 21, wherein said control
information is supplied from said second interface via an
access network control device (4) .
10

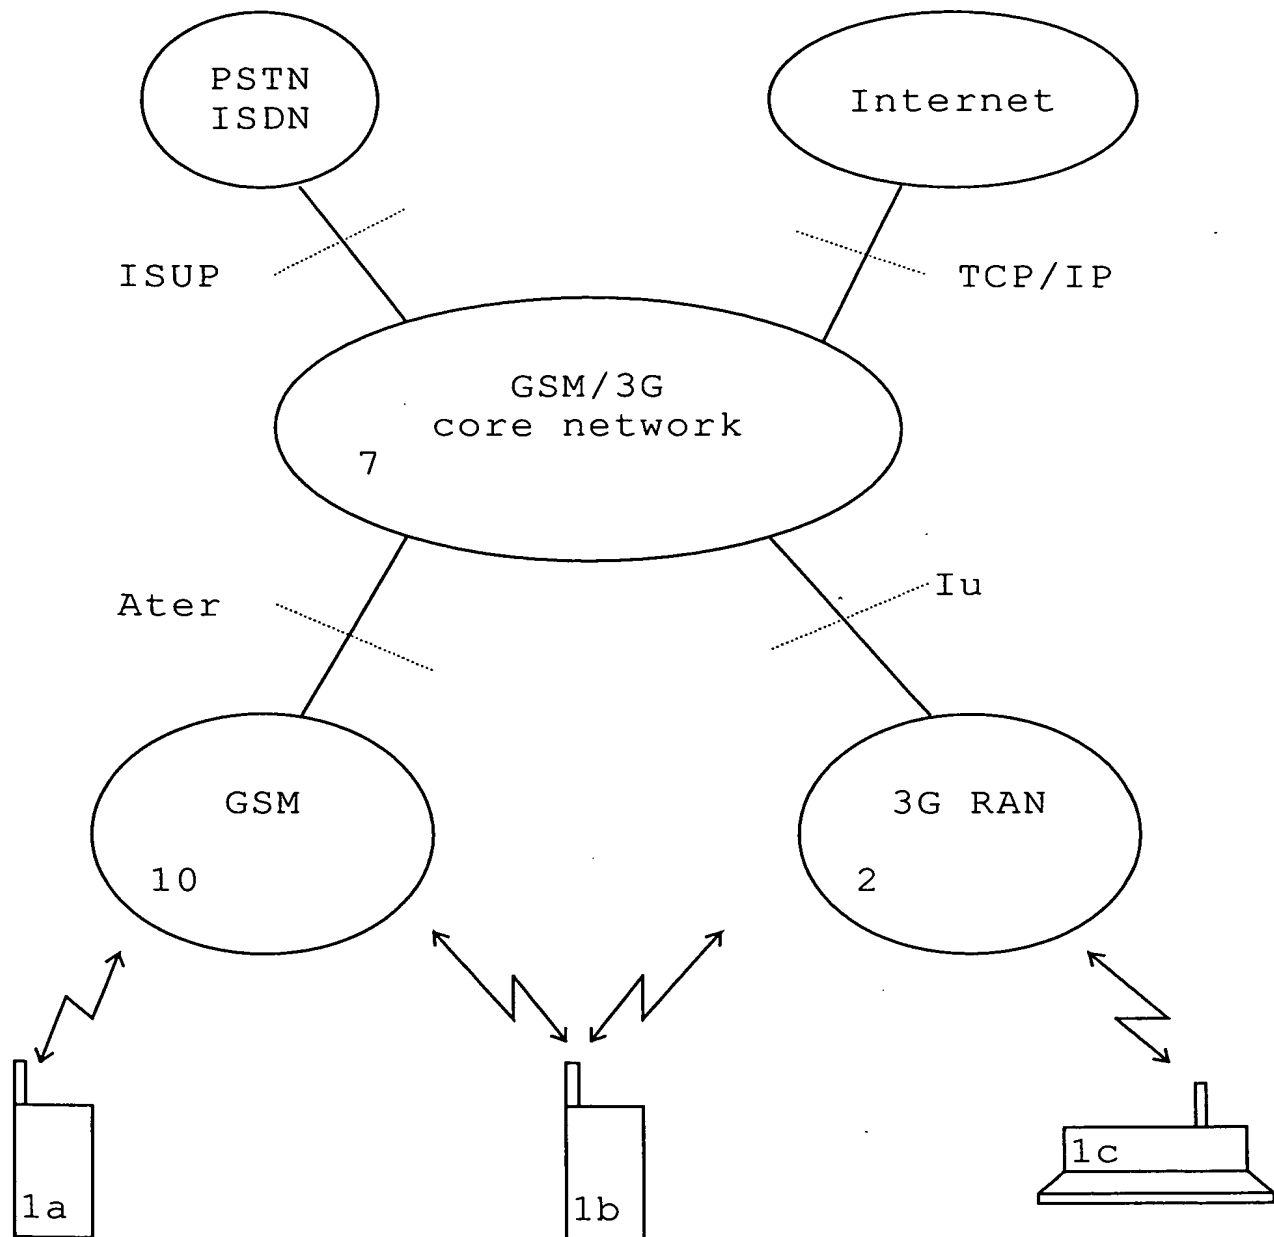
24. A method according to any one of claims 21 to 23,
wherein the ISUP protocol is used in said second interface.

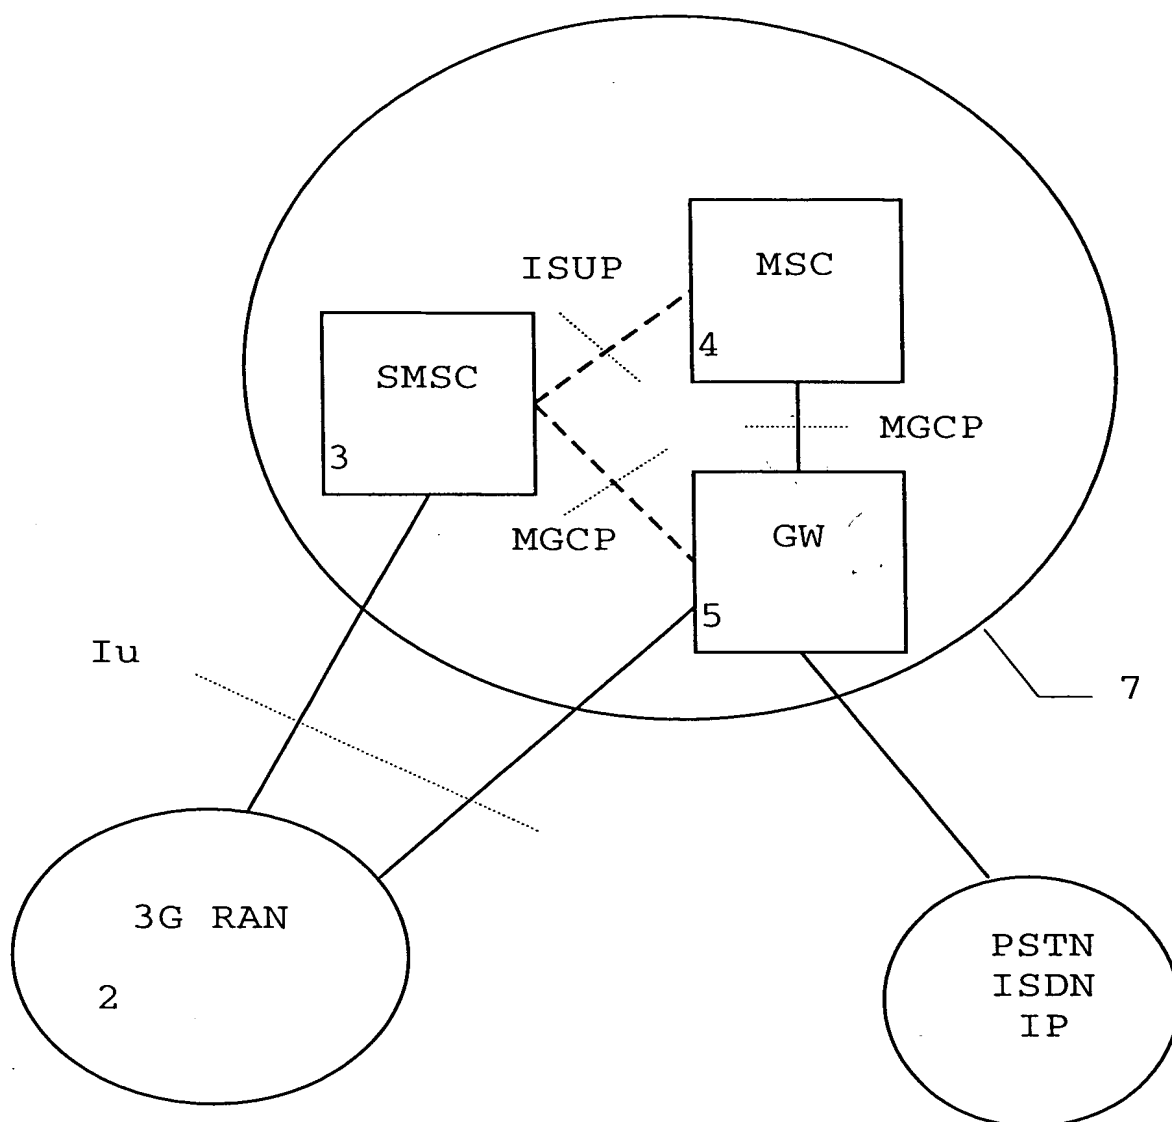
25. A method according to any one of claims 21 to 23,
15 wherein the MGCP protocol is use in said second interface.

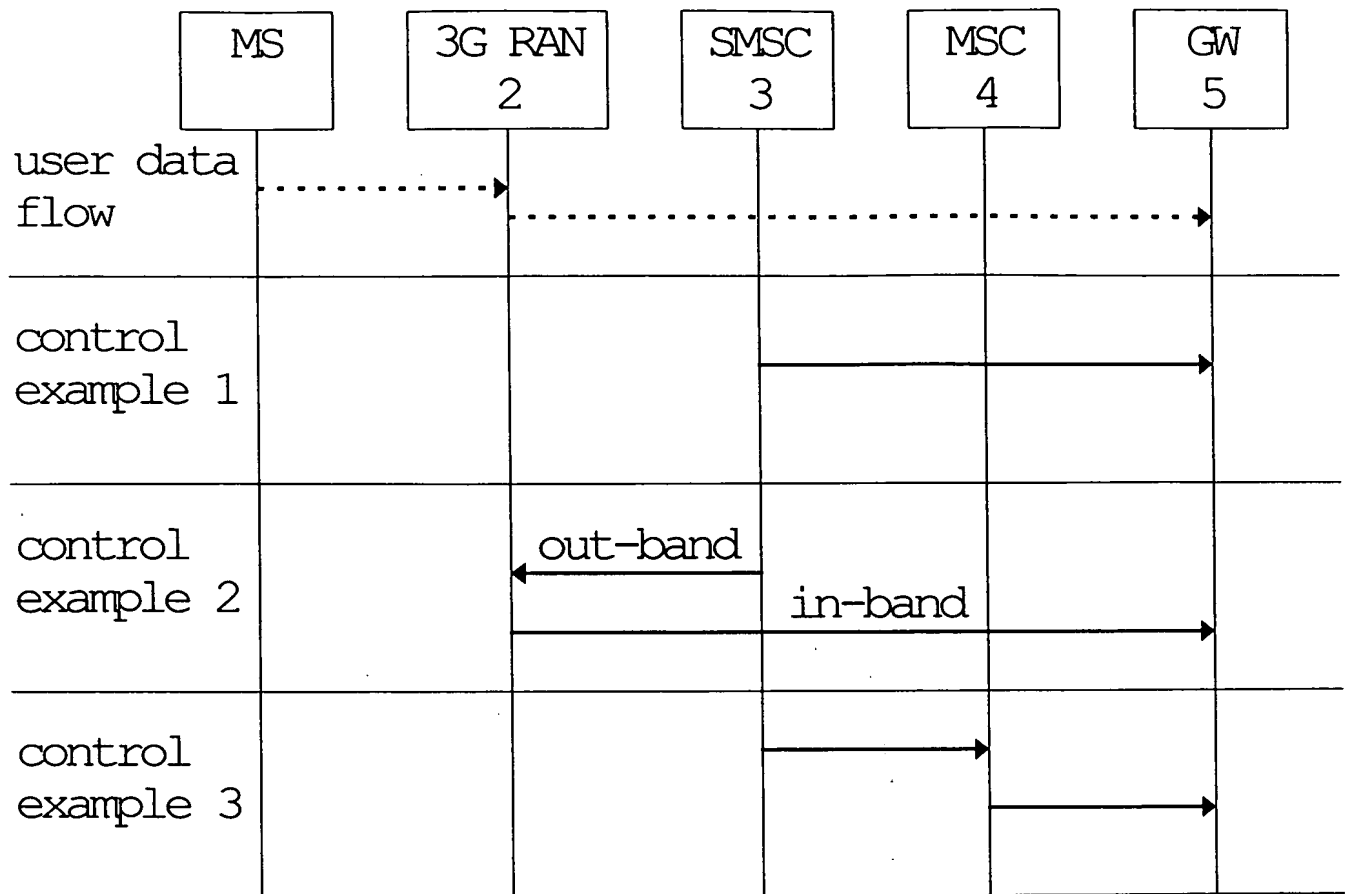
26. A method according to any one of claims 21 to 25,
wherein said first interface is an Iu interface.

Abstract

The present invention relates to a telecommunication network and a routing method, wherein user data are routed via an access network (2) to a gateway device (5) of a core network (7) connected to the access network (2) via a first interface. The control of the gateway device (5) is performed by supplying a control information from the core network (7) to the gateway device (5) via a second interface, and the user data are routed directly between the access network (2) and the gateway device (5) via the first interface. Thus, the user data are routed directly from the access network (2) to the gateway (5), whereas the control can be performed via a dedicated and open control interface. Thereby, the processing resources can be shared between several applications and trunking gains can be utilized. Furthermore, real-time transport capabilities can be provided by a simple method of connecting the Internet to the mobile network. (Fig. 2).

**Fig. 1**

**Fig. 2**

**Fig. 3**